

FIG. 1

RECEIVED SIGNAL
302
DEMOD.
DE-INT.
300
CHANNEL DECODER
304
306
PILOT BITS
RE-ENCODER
308
DECODED BITS

FIG. 2

400 402 404 406 408 410
400 402 404 406 408 410

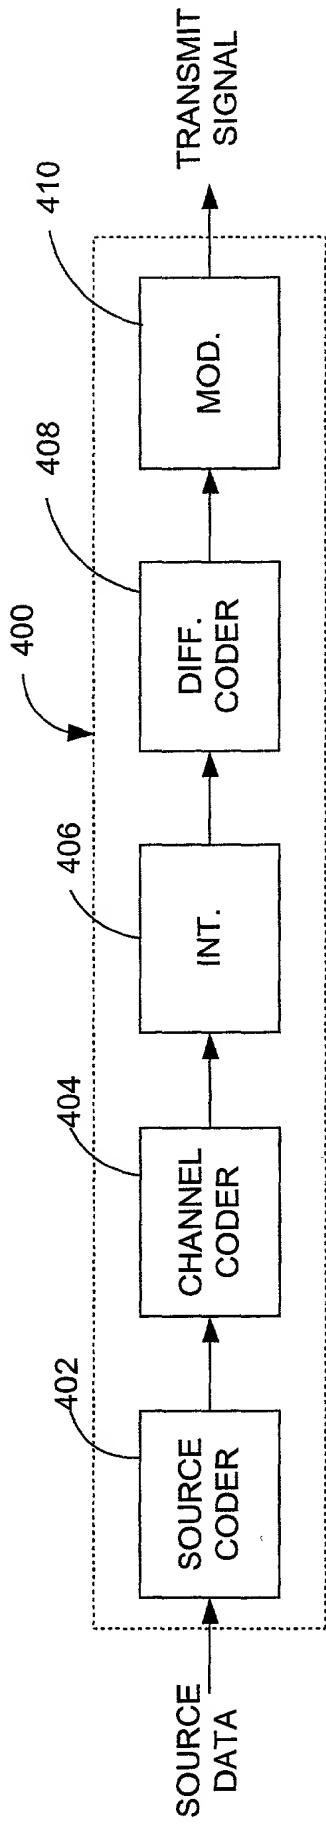


FIG. 3

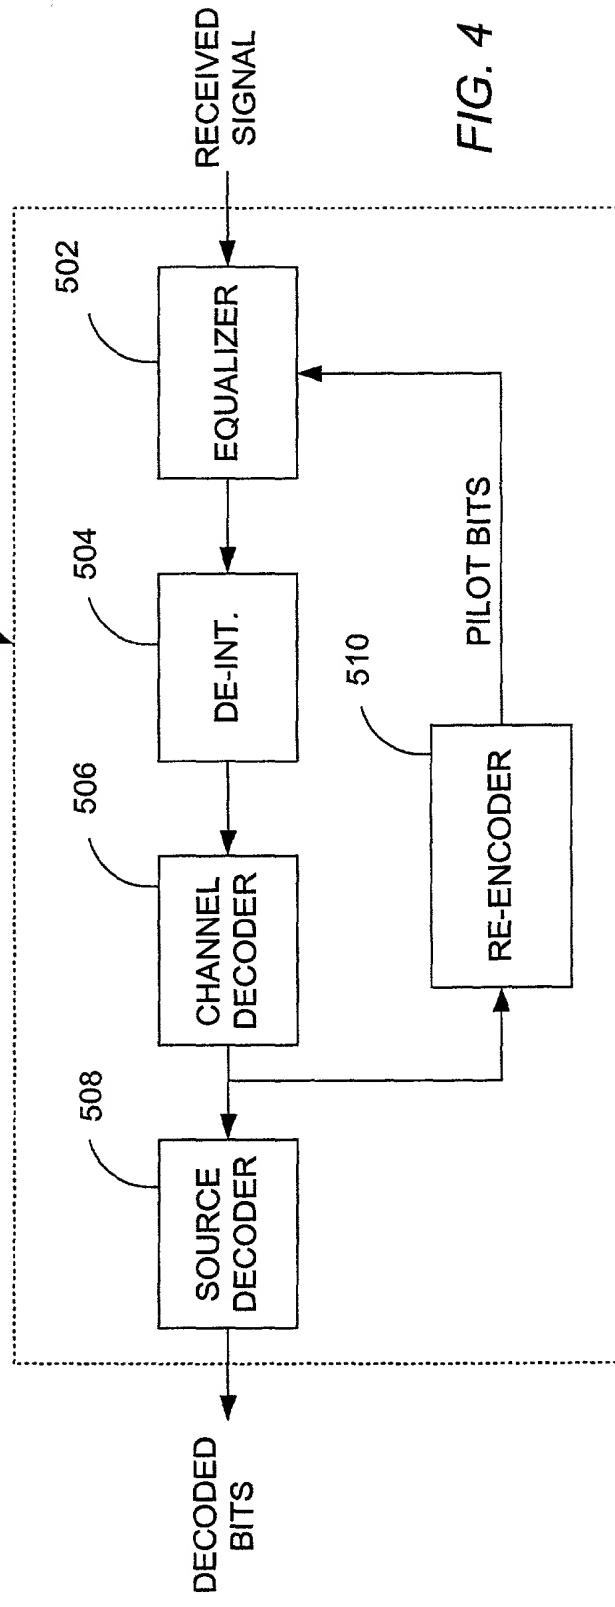


FIG. 4

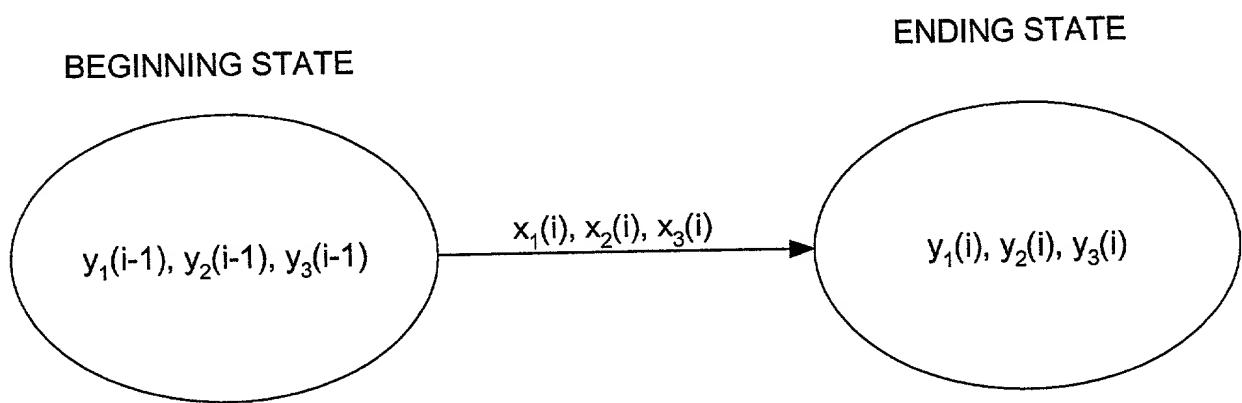


FIG. 5

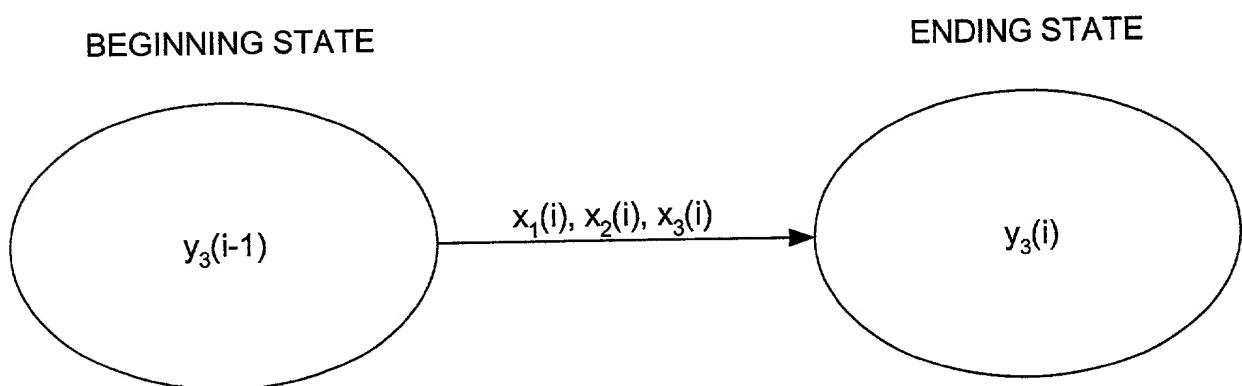


FIG. 6